




PCT/GB2004/000119



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Best Available Copy

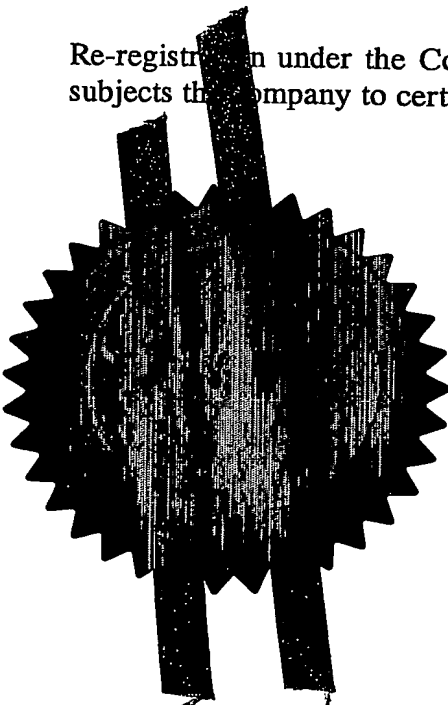

Signed

Dated 3 February 2004

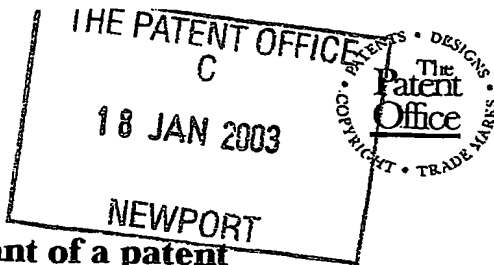

20JAN05 E778144-5 D02748  
P01/7700 0.00-0301169.9

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference P0786

2. Patent application number  
(The Patent Office will fill in this part)

**0301169.9**

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Cerasmaspeed Limited  
Zortech Avenue  
Oldington  
Kidderminster  
Worcestershire DY11 7DY

Patents ADP number (if you know it)

0428439002

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

RADIANT ELECTRIC HEATER

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

DEREK JACKSON ASSOCIATES  
The Old Yard, Lower Town  
Claines  
Worcester WR3 7RY

Patents ADP number (if you know it)

5600416002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
--	---------	---	--

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)
---	-------------------------------	--

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor; or

b) there is an inventor who is not named as an applicant; or

c) any named applicant is a corporate body.

See note (d))

yes

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 14

Claim(s)

Abstract

Drawing(s) 2

xl hm

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date 17 Jan 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Derek Jackson - Tel : 01905 755180

## Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

# RADIANT ELECTRIC HEATER

This invention relates to radiant electric heaters,  
particularly for use in cooking appliances behind a sheet  
5 of material such as of glass-ceramic. In particular, the  
sheet of material such as of glass-ceramic may be a  
cooking surface.

Radiant electric heaters are well known for use behind  
10 glass-ceramic cooking surfaces. Such heaters can  
comprise a dish-like support having therein a base layer  
of insulation material, such as microporous thermal and  
electrical insulation material. At least one electric  
heating element is provided, supported on the surface of  
15 the base layer. One form of heating element which has  
found wide acceptance is an elongate electrically  
conductive ribbon which is supported on edge and secured  
in the surface of the base layer.

20 It is known to provide a temperature-responsive device of  
rod-like form extending at least partly across the heater  
from an edge thereof and overlying the heating element or  
elements. Such temperature-responsive device operates to  
control the operation of the heater, such as to prevent  
25 the glass-ceramic material of the cooking surface

reaching a high temperature at which damage would occur thereto.

It has been found advantageous to provide the  
5 temperature-responsive device of rod-like form with an outer tube of metal. Such a metal outer tube is more robust than outer tubes of quartz, fused silica or ceramic materials which were previously commonly used for rod-like temperature-responsive devices. However, a  
10 problem arises with the use of a metal, and hence electrically conductive, tube in close proximity to the heating element or elements. With outer tubes of quartz, fused silica or ceramic materials a metal termination or ferrule is generally known to be provided at a distal end  
15 thereof inside the heater. With such an arrangement it is readily straightforward to ensure adequate clearance between the metal termination or ferrule and the heating element or elements by providing a local region underlying the metal termination or ferrule which is free  
20 from heating element material. However, this is not possible with a temperature-responsive device having a full length metal outer tube and some means is therefore required to maintain a specified minimum electrical clearance between the metal tube and the one or more  
25 heating elements along the full length of the metal tube. The problem is exacerbated when the rod-like temperature-

responsive device is only supported at a peripheral edge region of the heater, a distal free end region of the rod-like temperature-responsive device being unsupported at a central region within the heater. This means that, when the heater is subjected to mechanical shock, the free end of the rod-like temperature-responsive device may undergo displacement towards the heating element.

As a result of manufacturing tolerances, the rod-like temperature-responsive device when mounted on the heater may not be parallel to the base of the heater and such that the free end of the device is closer to the heating element than is the opposite end of the device.

Furthermore, in the case of a heater having a rod-like temperature responsive device overlying a heating element or elements, a local increase in temperature may occur in those regions of the heating element or elements which lie directly beneath the rod-like temperature-responsive device. This can result in premature operation of the temperature-responsive device and may also contribute to premature failure of the heating element or elements.

This problem has been addressed in GB-A-2340715 wherein the surface of the base of thermal insulation material supporting the heating element or elements is provided with a shallow recess beneath the rod-like temperature-

responsive device. A ribbon-form heating element, which is partially embedded in the base, is partially embedded to a lesser extent in the shallow recess than in the surface of the base at either side of the recess. This results in a heating element which has a substantially planar upper surface and although it results in a lower temperature of the portion or portions of the heating element directly underlying the rod-like temperature-responsive device, it does not deal with the problem of ensuring satisfactory minimum clearance between the outer tube, particularly of metal, of the rod-like temperature-responsive device and the underlying heating element or elements.

15 It is an object of the present invention to overcome or minimise this problem.

According to the present invention there is provided a radiant electric heater comprising: a base of thermal and electrical insulation material having a surface supporting at least one electric heating element comprising at least one elongate electrically conductive ribbon, the at least one electrically conductive ribbon being supported on edge; a rod-like temperature responsive device extending lengthwise partly across the heater from an edge thereof and over the at least one

electric heating element; the surface of the base being provided with an elongate recess with sloping sides extending beneath and along the length of the rod-like temperature-responsive device, the at least one electrically conductive ribbon being supported in and traversing the elongate recess such that an upper edge of the at least one electrically conductive ribbon substantially follows a contour of the surface of the recess and whereby the upper edge of the at least one electrically conductive ribbon at a region underlying the rod-like temperature-responsive device is provided at a predetermined distance from the rod-like temperature-responsive device and is at a lower level relative to the upper edge of the at least one electrically conductive ribbon at regions at either side of the elongate recess.

The rod-like temperature-responsive device may comprise metal and may comprise a metal tube.

The rod-like temperature-responsive device may have a first end supported at an edge region of the heater and a second end substantially unsupported at an inner region of the heater.

The elongate recess may have a depth which increases with increasing distance from the edge of the heater.



The elongate recess may also have a width which increases with increasing distance from the edge of the heater and may be such that a substantially constant angle of the sloping sides of the elongate recess is maintained as the depth of the elongate recess increases with increasing distance from the edge of the heater.

The elongate recess may be of substantially shell or scallop form.

10

The at least one electrically conductive ribbon may be of corrugated form and may be provided with a plurality of spaced-apart legs, integral with the at least one electrically conductive ribbon or secured thereto, the legs extending edgewise from the at least one electrically conductive ribbon and being at least partially embedded in the surface of the base. The legs may be partially embedded in the surface of the base to substantially the same depth in the elongate recess as elsewhere on the base.

20

The base may comprise microporous thermal and electrical insulation material and may be provided in a dish-like support, such as of metal.

25

The radiant electric heater may be adapted for location beneath a cooking surface, such as of glass-ceramic material.

5 By means of the present invention, the at least one electric heating element in the form of at least one electrically conductive ribbon is secured to and supported on the surface of the base such that it descends into the elongate recess on one sloping side thereof, passes underneath the rod-like temperature-responsive device at a predetermined distance therefrom, and then ascends from the elongate recess on the opposite sloping side thereof. Thus a required minimum electrical clearance is achieved between the at least one  
10 electrically conductive ribbon and the rod-like temperature-responsive device, which is essential when the device comprises metal. Furthermore, provision of increasing depth of the elongate recess with increasing distance from the edge of the heater enables the minimum  
15 required electrical clearance to be maintained if the rod-like temperature-responsive device is mounted on the heater sloping downwardly towards the base of the heater, or if the rod-like temperature-responsive device undergoes deflection in a direction towards the base of  
20 the heater, such as if the heater is subjected to mechanical shock conditions. Provision of increasing

width of the elongate recess with increasing distance from the edge of the heater allows a substantially constant and suitably shallow angle of the sloping sides of the recess to be maintained, with the accompanying  
5 increase in depth of the recess with increasing distance from the edge of the heater, whereby descent and ascent of the at least one electrically conductive ribbon into and out of the recess is facilitated.

10 The arrangement of the present invention also minimises or reduces local increase in temperature of the at least one electrically conductive ribbon at a region or regions thereof directly underlying the rod-like temperature-responsive device.

15

For a better understanding of the present invention and to show more clearly how it may be carried into effect, reference will now be made by way of example to the accompanying drawings in which:

20

Figure 1 is a plan view of an embodiment of a radiant electric heater according to the present invention;

Figure 2 is a section along line A-A of Figure 1;

25

Figure 3 is a section along line B-B of Figure 1; and

Figure 4 is a perspective view of the radiant electric heater of Figure 1.

A radiant electric heater 2, such as for use underneath a cooking surface 4, for example of glass-ceramic material, comprises a metal dish-like support 6 having therein a base layer 8 of thermal and electrical insulation material, such as microporous thermal and electrical insulation material. A radiant electric heating element is provided comprising an elongate corrugated electrically conductive ribbon 10, such as of iron-chromium-aluminium alloy, having spaced-apart legs 12 integral with or secured thereto and extending edgewise therefrom. The ribbon 10 is mounted edgewise on the base layer 8 and secured by at least partial embedding of the legs 12 in the surface of the base layer 8.

A peripheral wall 14 of insulation material is provided in the heater and has a top surface which may be arranged to contact a rear side of the cooking surface 4 in a cooking appliance.

A rod-like temperature-responsive device 16 is provided, comprising a metal outer tube and extending partly across the heater from an edge thereof. The rod-like temperature-responsive device 16 is supported at the edge

of the heater and has a free end 18 which is unsupported at an inner region of the heater.

The rod-like temperature-responsive device 16 may  
5 comprise differentially-expanding components, which operate a switch means 20 provided at a periphery of the heater. Alternatively, the rod-like temperature-responsive device 16 may comprise a metal tube enclosing an electrical component (not shown) having an electrical  
10 parameter which changes with temperature. Such electrical component may be a resistance temperature detector, such as a platinum resistance temperature detector, whose electrical resistance changes as a function of temperature. The electrical component may be  
15 connected to external processing circuitry by means of lead wires passing through the metal tube of the device 16.

An elongate recess 22, with sloping sides 24, 26, is  
20 provided in the surface of the base layer 8. The elongate recess 22 extends radially from the edge of the heater and beneath and along the length of the rod-like temperature-responsive device 16. The electrically conductive ribbon 10 is arranged to be supported in and  
25 to traverse the elongate recess 22 such that an upper edge 28 of the ribbon 10 substantially follows a contour

of the surface of the recess 22. The upper edge 28 of the ribbon 10 at a region 30 underlying the temperature-responsive device 16 is arranged at a predetermined distance from the temperature-responsive device 16 and is provided at a lower level relative to the upper edge 28 of the ribbon 10 at regions 32, 34 at either side of the recess 22.

The electrically conductive ribbon 10 is arranged with its legs 12 embedded in the base layer 8 to substantially the same extent in the elongate recess 22 as elsewhere in the base layer 8.

As shown particularly in Figures 2 and 3, the electrically conductive ribbon 10, supported on and secured to the base layer 8, descends into the recess 22 on one sloping side 24 thereof, passes with predetermined clearance underneath the rod-like temperature-responsive device 16, and then ascends from the recess 22 on the opposite sloping side 26 thereof. The angle and dimensions of the sloping sides 24, 26 of the recess 22 are selected in accordance with a depth required for the recess 22 and to facilitate turning of the ribbon 10 into and out of the recess 22.

The free end 18 of the rod-like temperature-responsive device 16 may undergo displacement in a direction towards the base layer 8 in event that the heater 2 is subjected to mechanical shock load conditions. Alternatively, or  
5 additionally, the rod-like temperature-responsive device 16 when mounted on the heater may not be parallel to the surface of the base layer 8, due to manufacturing tolerances, and such that it slopes downwardly towards the base 8. In order to ensure that a predetermined  
10 minimum electrical clearance exists between the temperature-responsive device 16 and the ribbon 10 at all times, under all conditions, it is arranged for greater clearance to be provided between the ribbon 10 and the rod-like temperature-responsive device 16 at the free end  
15 region 18 of the temperature-responsive device 16 than at the end thereof near the edge of the heater. For this purpose, the elongate recess 22 is arranged, such as by being ramped, to have a depth which gradually increases with increasing distance from the edge of the heater.  
20 This is particularly illustrated in Figures 2 and 3. Figure 2 represents a cross-sectional view of the heater 2 at a region near the edge of the heater, while Figure 3 represents a cross-sectional view of the heater 2 at an inner region of the heater, near the free end 18 of the  
25 rod-like temperature-responsive device 16. As shown in Figure 2, a distance D1 is provided between the region 30

of the upper edge 28 of the ribbon 10 and the rod-like temperature-responsive device 16 at the region of the heater near the peripheral edge thereof. As shown in Figure 3, a distance D2, which is greater than the distance D1 of Figure 2, is provided between the region 30 of the upper edge 28 of the ribbon 10 and the temperature-responsive device 16, at the inner region of the heater near the free end 18 of the rod-like temperature-responsive device 16.




10

In order to maintain a substantially constant angle of slope of the sloping sides 24, 26 of the recess 22, while accommodating the gradually increasing depth of the recess 22 with increasing distance from the edge of the heater, it is suitably arranged for the recess 22 to gradually increase in width with increasing distance from the edge of the heater. Accordingly, the width W1 of the recess 22 at a region near the edge of the heater is made less than the width W2 at an inner region of the heater near the free end 18 of the temperature-responsive device 16. The recess 22 is therefore arranged to taper in width as well as being ramped in depth and the resulting form thereof is substantially that of a shell or scallop.



An end region 36 of the elongate recess 22 may terminate in any desired form, such as a wall form, or be of stepped or sloping form.

- 5 The arrangement of the recess 22 and the rod-like temperature-responsive device 16 is further advantageous in that it minimises or reduces any tendency for the ribbon-form heating element 10 to operate with a higher temperature in the region directly beneath the rod-like
- 10 temperature-responsive device 16, compared with regions elsewhere in the heater.

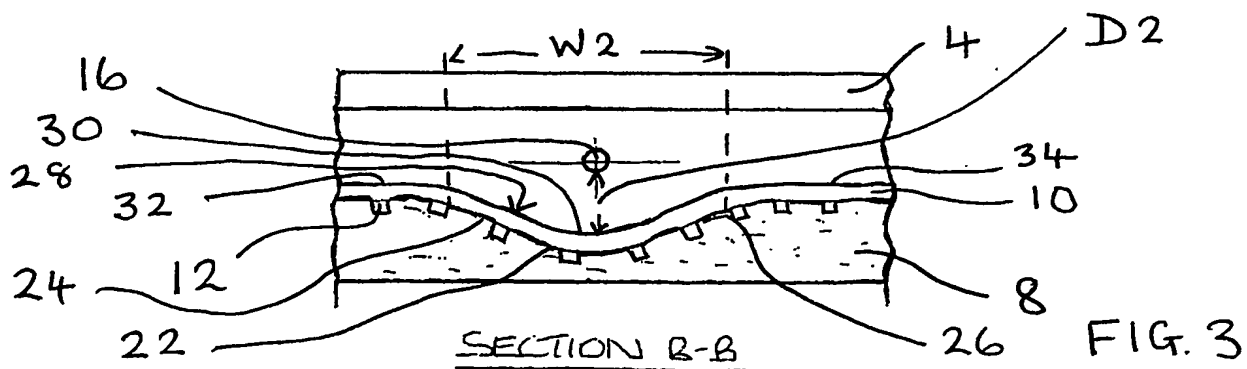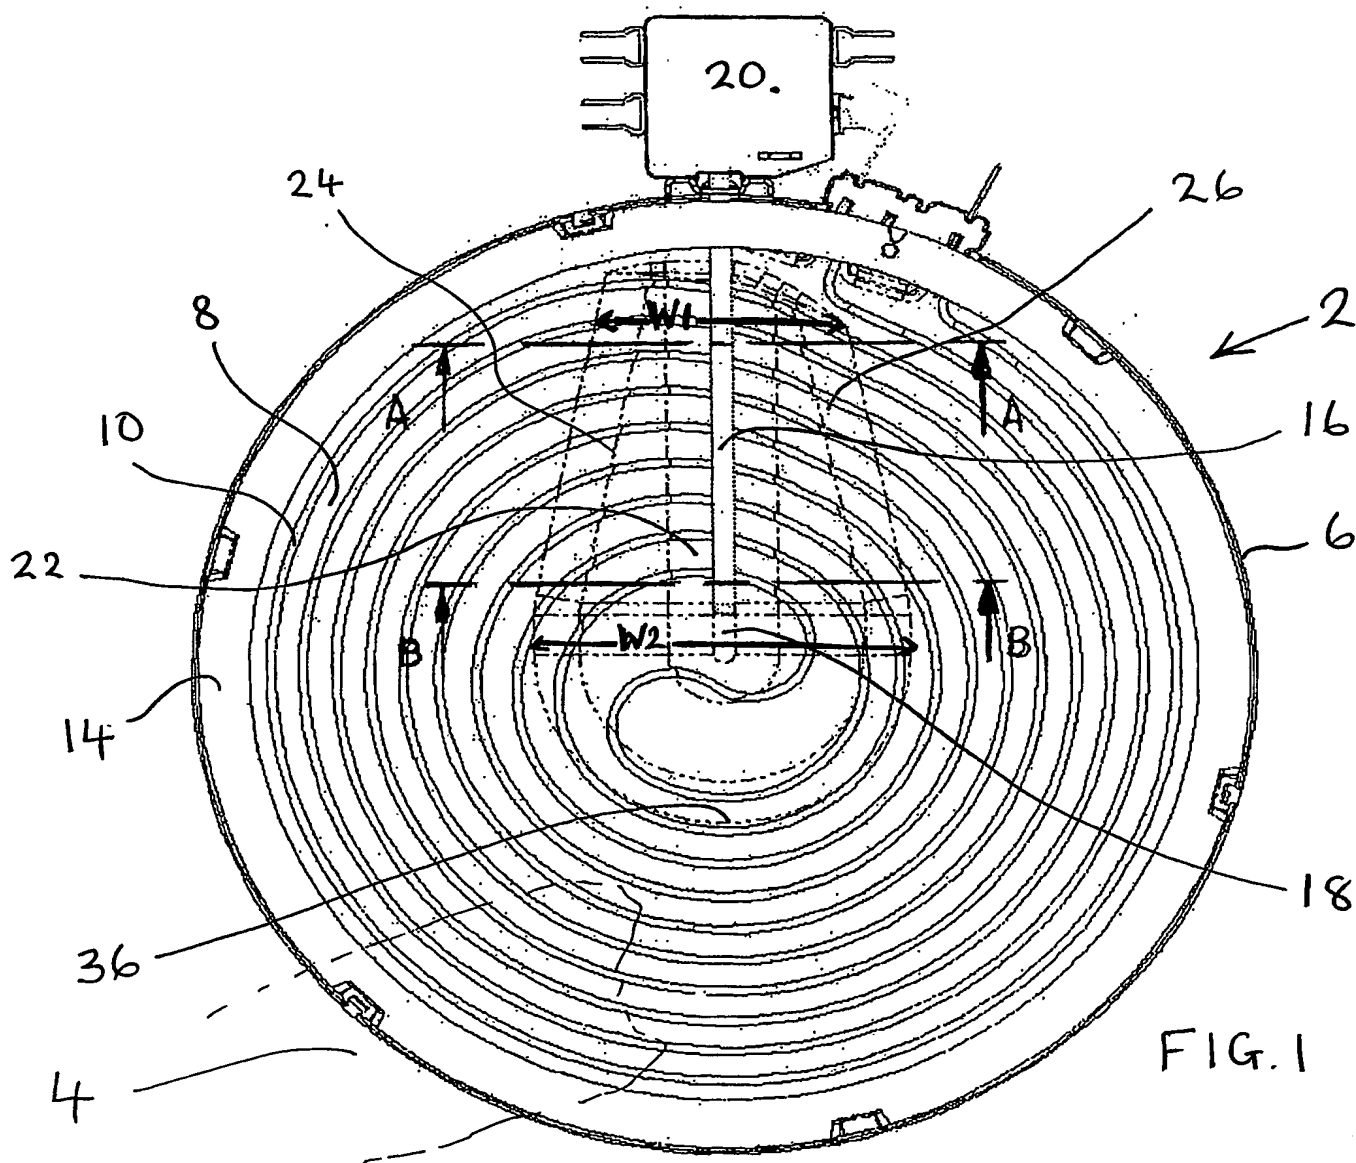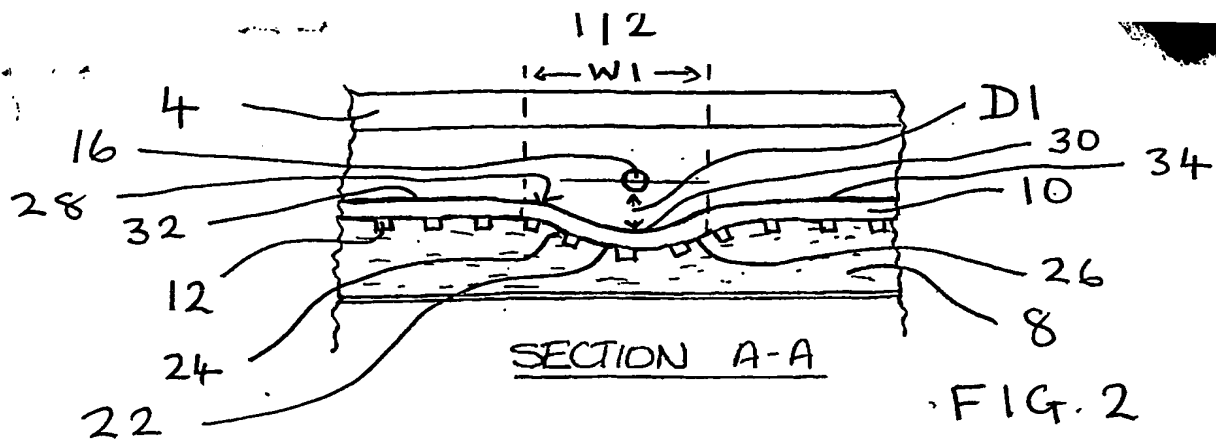

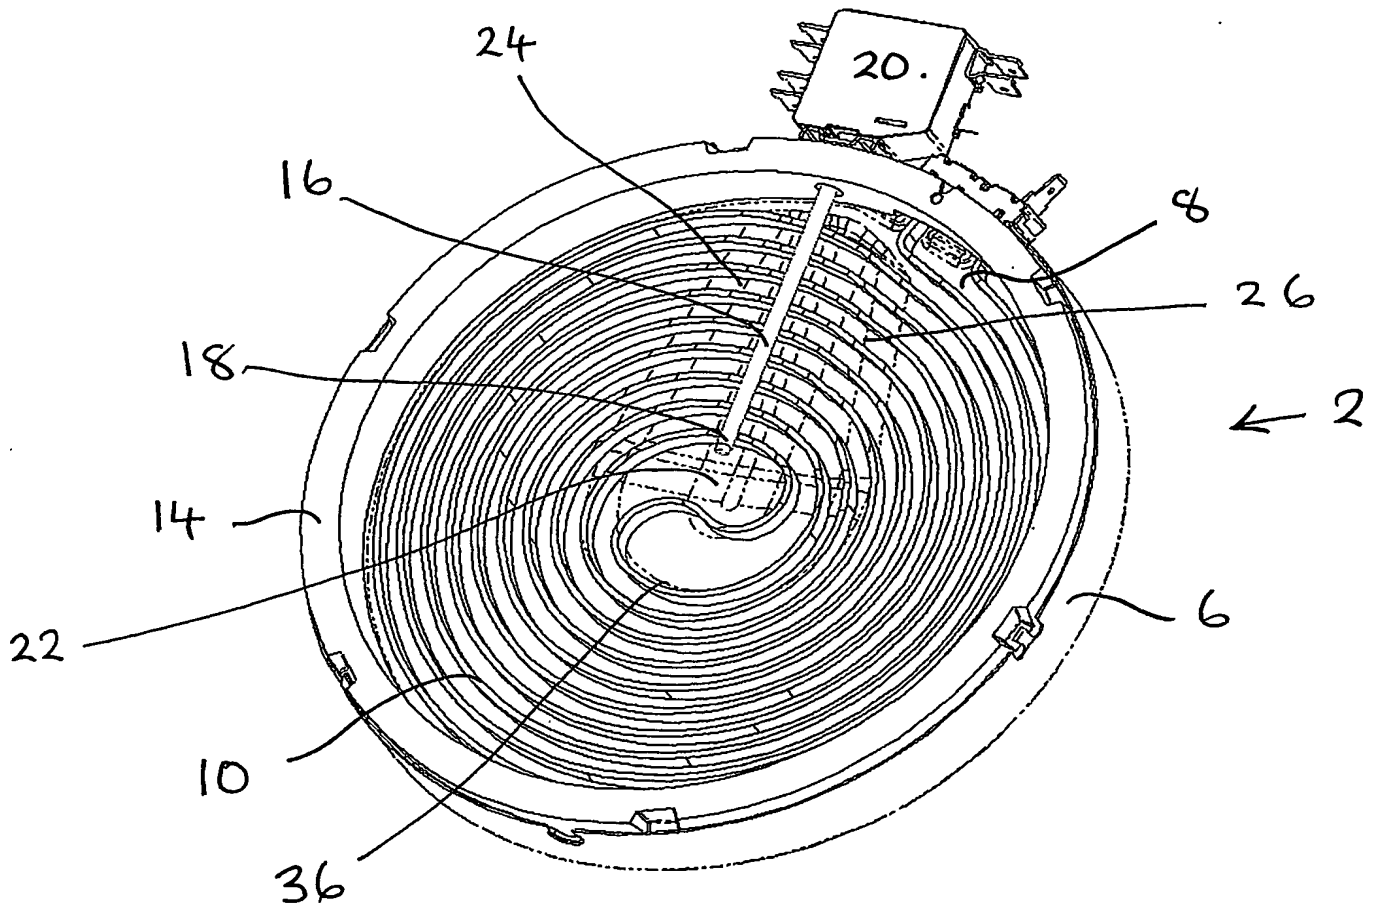


FIG. 4

PCT Application  
PCT/GB2004/000119



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**